

# IEC Connectors & NEMA Receptacles




**UL CSA 10A 250V ac UL 65°C**

**RoHS** RoHS compliant

To order:  
State type number, connector terminal code, switch terminal code (if applicable), and for snap-in items, the panel thickness. Stocked items are for 1.0mm panels.

- ▶ Ratings up to 10A, 250V ac
- ▶ IEC 320 Inlets & outlets
- ▶ NEMA outlets
- ▶ Fused and non fused
- ▶ Flange and snap to panel fixing




**ORDER FORMAT**


TYPE	TERMINAL
<b>0707-1-C</b>  Inlet	<b>S</b> 2.5 Solder
	<b>N</b> 4.0 Solder
	<b>Q</b> 4.8 Tab
	<b>W</b> 6.3 Tab
<b>0708-1-C</b>  Outlet	<b>N</b> 4.0 Solder
	<b>Q</b> 4.8 Tab
	<b>W</b> 6.3 Tab
	<b>P</b> PCB
<b>0709-P</b>  Outlet	<b>L</b> 4.0 Solder
	<b>Q</b> 4.8 Tab
<b>0710-P</b>  Outlet	<b>V12</b> Solid Wire
	<b>V16</b> Solid Wire
<b>0711-P</b>  Inlet	<b>S</b> 2.5 Solder
	<b>N</b> 4.0 Solder
	<b>Q</b> 4.8 Tab
	<b>W</b> 6.3 Tab

## DIMENSIONS (mm)


View below is at Y

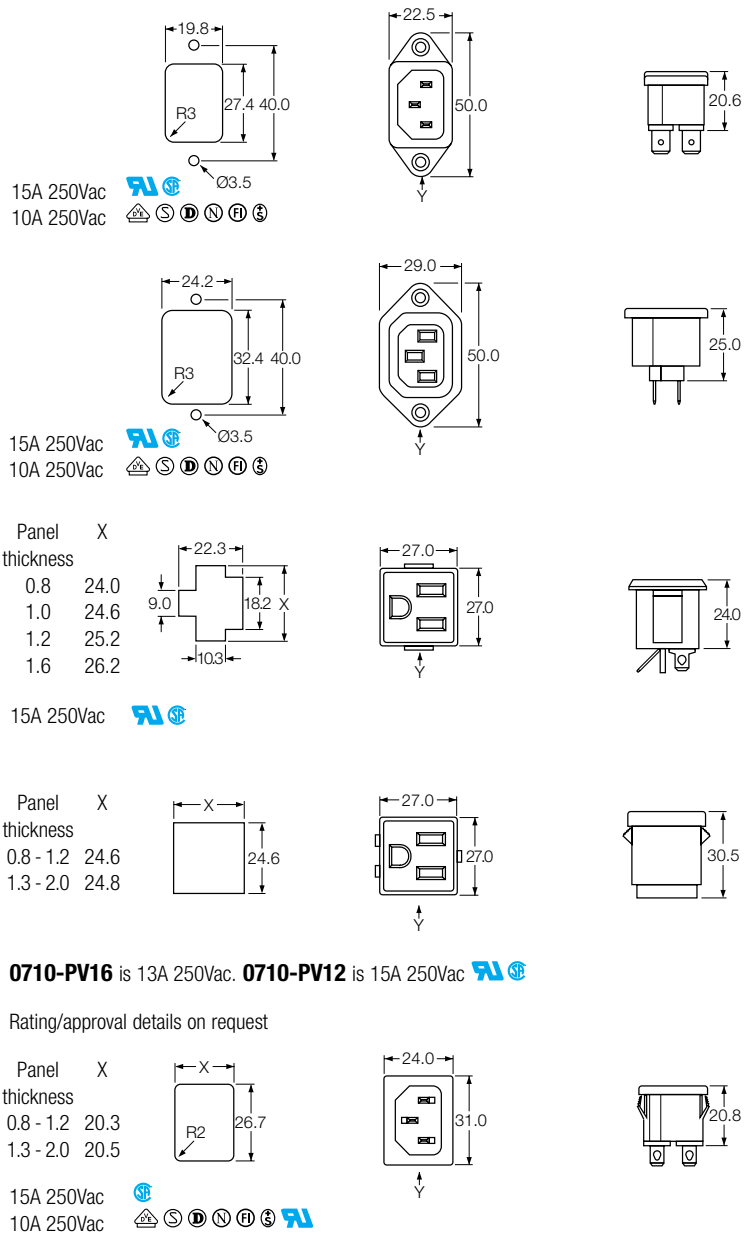

# IEC Connectors & NEMA Receptacles



- ▶ Ratings up to 10A, 250V ac
- ▶ IEC 320 Inlets & outlets
- ▶ Fused and non fused
- ▶ Flange and snap to panel fixing



10A 250V ac



UL CSA 10A 250V ac UL 65°C



RoHS compliant


To order:  
State type number, connector terminal code, switch terminal code (if applicable), and for snap-in items, the panel thickness. Stocked items are for 1.0mm panels.







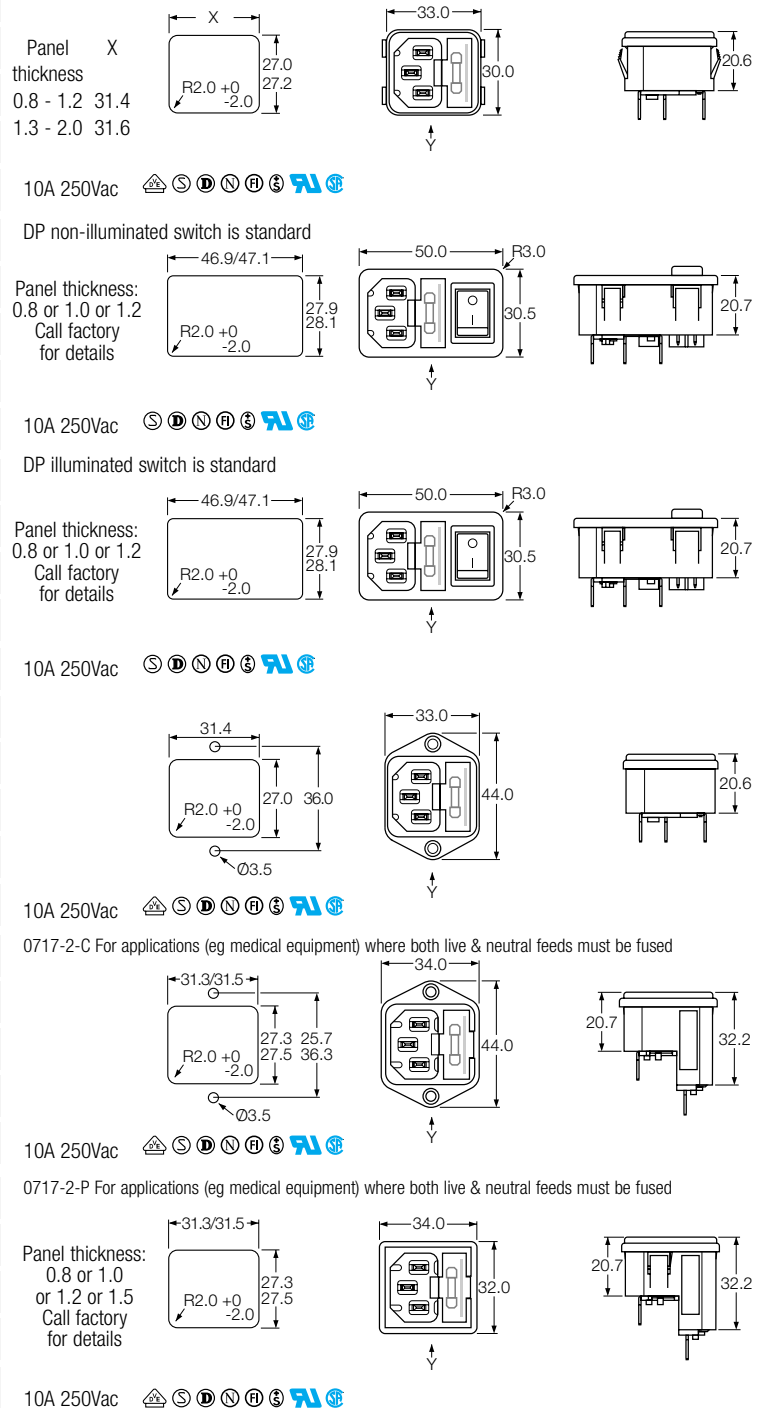

## ORDER FORMAT

TYPE	TERMINAL
<b>0717-1-P</b>  Fused Inlet 5x20	<b>S</b> 2.5 Solder <b>LS</b> 2.8 Solder <b>Q</b> 4.8 Tab <b>W</b> 6.3 Tab
<b>0717-1S State "Non Lit"</b>  Switched Fused Inlet 5x20	<b>Q</b> 4.8 Solder Connector <b>T</b> 4.8 Solder Switch
<b>0717-1S State "Lit"</b>  Switched Fused Inlet 5x20	<b>Q</b> 4.8 Solder Connector <b>T</b> 4.8 Solder Switch
<b>0717-C</b>  Fused Inlet 5x20	<b>S</b> 2.5 Solder <b>LS</b> 2.8 Solder <b>Q</b> 4.8 Tab <b>W</b> 6.3 Tab
<b>0717-2-C</b>  Double Fused Inlet 5x20	<b>S</b> 2.5 Solder <b>LS</b> 2.8 Solder <b>Q</b> 4.8 Tab <b>W</b> 6.3 Tab
<b>0717-2-P</b>  Double Fused Inlet 5x20	<b>S</b> 2.5 Solder <b>LS</b> 2.8 Solder <b>Q</b> 4.8 Tab <b>W</b> 6.3 Tab

## DIMENSIONS (mm)


View below is at Y



TYPE	TERMINAL
<b>0721-P</b>  Inlet	<b>S</b> Solder     
<b>0722-C</b>  Inlet	<b>Q</b> 4.8 Solder  <b>W</b> 6.3 Tab    
<b>0723-C</b>  Outlet	<b>Q</b> 4.8 Solder  <b>W</b> 6.3 Tab    

### DIMENSIONS (mm)

View below is at Y

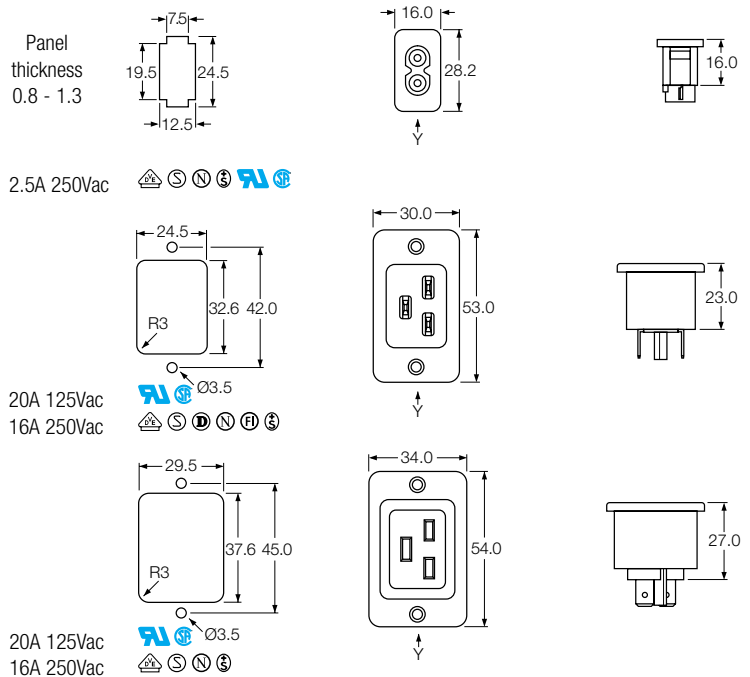













### Technical data

Mouldings V2 (VO option)  
 Connectors Tin plated solid brass  
 Terminals Silver plated

### Terminal dimensions

#### For Connectors

#### For Switches

For Connectors								For Switches			
S	N	Q	W	P	L	LS	V12	V16	Slide T	Slide K	Rocker T
2.5mm Solder	4mm Solder	4.8mm Solder/ Fast on	6.3 Fast on	PCB	Solder	2.8mm Solder	12-14 AWG Solid Wire	16 AWG Solid Wire	Solder	2.8mm Solder	4.8mm Solder
											
1.5x2.5 4.5	2.0x3.2 5.5	2.8x3.3 6.5	Ø1.7 8.0	1.7x3.0 5.5	Ø3.0x6.0	1.5x3.0 10.0	1.35	0.8	2.5 6.0 1.6	2.5 7.0 1.3	R1.0 R0.8 3.5 8.5

Note: Designated solder terminals should not be fitted with "Push on", "QD" or "Fast on" type cable connectors