

1500 Twin Units Switches and Indicators 16A 250Vac

rocker switches



- ▶ Twin unit rocker switch
- ▶ Choice of switching circuits including 3 position
- ▶ Push-on, solder and PCB terminals
- ▶ Choice of bezel styles
- ▶ Choice of 6 panel cut outs
- ▶ We match all major brands
- ▶ Matching indicator
- ▶ Single pole switches
- ▶ Splashproof option
- ▶ Panel cut out 'A' style: 27.2 x 22.3mm



16(4)A 250Vac T125



UL CSA 16A 250Vac

UL CSA (2 posn) 250Vac 1hp, 125Vac 1/2hp, (3 posn) 250 Vac 1/2hp, 125Vac 1/4hp

UL 85°C, file E45221, CSA file LR10990

In house test

Inrush 36A to EN61058-1

For versions with High Inrush or for 50,000 operations, see page 20.



RoHS compliant

3mm contact gap except where marked μ .
Technical data on pages 4 & 5 (switches), 6 (indicators).

NON-LIT		LIT*	
B BLACK	B BLACK	A AMBER	X ROCKER COLOR R,G
R RED	R RED	C CLEAR	2 125V NEON* *Indicator only
W WHITE	W WHITE	G GREEN	3 250V NEON*
		R RED	7 12V INCANDESCENT*


C 1500/1500 A L B R 2 602AW

ORDER FORMAT

TERMINAL CODE	FUNCTION CODE	ROCKER CODE	BODY CODE	BODY COLOR	ROCKER COLOR	LAMP VOLTAGE OR "ON LIGHT"	LEGEND & OPTIONS
---------------	---------------	-------------	-----------	------------	--------------	----------------------------	------------------


TERMINAL	FUNCTION	ROCKER
<p>C</p> <p>6.3 x 0.8</p>	<p>Approvals & ratings vary with function ON OFF Switches - ON when pressed over terminal 1 or 4</p>	<p>A Softline (Matt)</p>
<p>H</p> <p>4.8 x 0.8</p>	<p>1500 ON - OFF</p>	<p>B Softline splash resistant (Matt)</p>
<p>K</p> <p>2.8 x 0.8</p>	<p>1510 μ HP rating N/A</p> <p>ON - ON</p>	<p>W Curved splash resistant (Matt)</p>
<p>T</p> <p>Solder</p>	<p>1520 μ 125V & 250V 1/2 HP H terminal rated T100 only</p> <p>ON - OFF - ON</p>	<p>X Two colour (Matt) (not momentary) ON - OFF only</p>
<p>X</p> <p>PCB 0.8Sq</p>	<p>430 X terminal N/A</p> <p>Indicator Technical data on page 6</p>	<p>A Softline lens (Matt) (Indicator)</p>

Splash Resistant






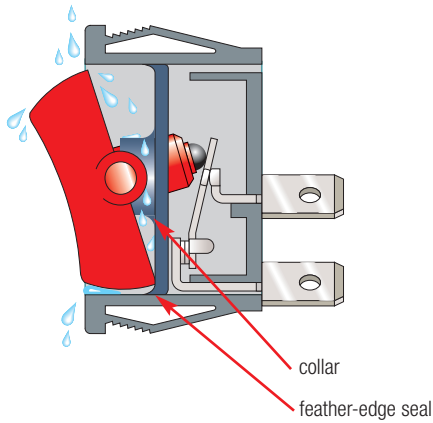


1500 W and B splash resistant options

Feather edge seals and a close fitting collar protect current carrying parts from moisture.
B option has Hytrel collar/seals for enhanced protection.



BODY

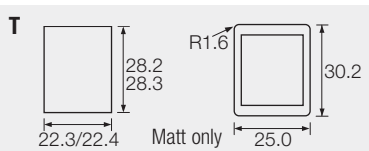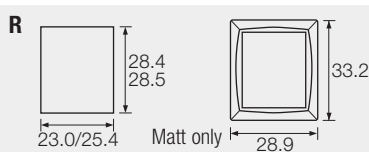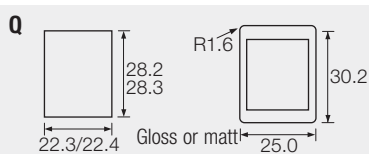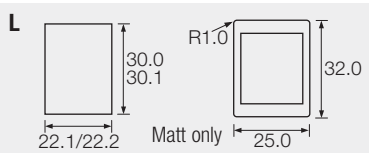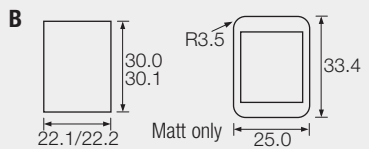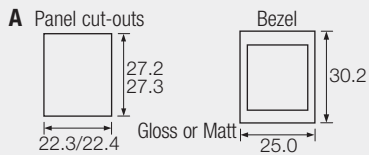

Cut-outs must be punched in the direction of insertion

OPTIONS


Finish Matt is standard

Color Call factory for custom colors
A full range is available for large orders

Legend printing Call factory for custom legends. State if a legend is to appear on the right or left hand unit (viewed from the front)

Lamp voltage Call factory for details

DIMENSIONS (mm)




Call sales for terminal spacing details

Panel thickness

- A,Q** 0.75 to 3.3mm
- L,B,T** 0.75 to 2.5mm
- R** 0.75 to 3.0mm

Twin units

Two single switches or a switch and an indicator light can be assembled side by side in one double pole body.

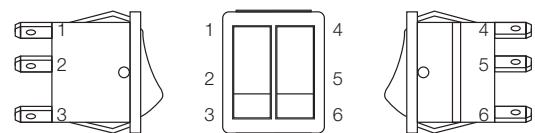

For twin units the first set of order format details refer to the left hand unit, when looking at the front of the assembly.
(This has terminal numbers 1, 2 & 3)

Examples of our range of legend printing

() is legend color B-Black, W-White, R-Red



602A(W)



1091(W)

For all options call the factory