

Neon & LED Indicator Lights Sealed to IP52 and IP54

▶ **ORDER FORMAT** example

NL 3130 S 2R

SERIES CODE MODEL CODE TERMINAL CODE VOLTAGE & COLOR
see p 6

- ▶ IP52 and IP54 sealing
- ▶ Three bezel sizes: 18.0, 20.5 and 30.0 dia.
- ▶ Neon or LED indicator
- ▶ Black and satin chrome bezel or without bezel
- ▶ Recessed screw terminals



Approval shown for neon versions only

RoHS RoHS compliant


Neon versions feature integral current limiting & ghost lighting resistors.

LED versions have rectifier diodes & resistors for direct connection to 28Vac/dc.

IP52 is standard.

A panel sealing washer is available for IP54

SERIES	MODEL	TERM	VOLTAGE & COLOR see p6	SEALING OPTION State IP52 or IP54
LE LED NL Neon	3130 No bezel 	S Recessed Screw	13.2 8.0max 120°C neon 50°C LED	
LE LED NL Neon	3160 Black bezel 	S Recessed Screw	16.2 5.0max 120°C neon 50°C LED	
LE LED NL Neon	3161 Satin chrome style bezel 	S Recessed Screw	16.2 5.0max 55°C neon 50°C LED	
LE LED NL Neon	3221 Large black bezel 	S Recessed Screw	22.3 4.5max 120°C neon 50°C LED	

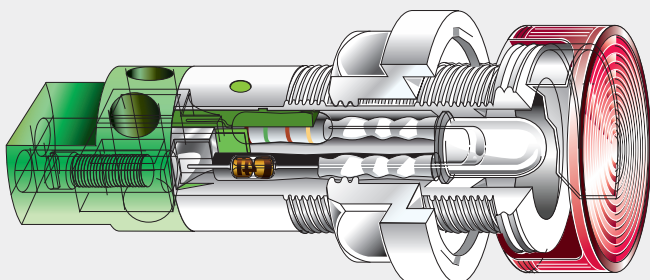

Select the version most suitable for your application from the 4 types shown.
Or call sales for availability to your special requirements.