

Safety Cut-out Switches 16A 250Vac



- ▶ Safety cut-out switches
- ▶ Ratings up to 16A, 250V ac
- ▶ Snap action switches
- ▶ NC contacts
- ▶ Pendulum or lever tilt operation

Safety requirements for Portable Heaters can be met by the fitting of a safety cut-out switch. The heater will then turn off if overturned.



C0320AA
15A 125/250Vac 1E4

15A 125/250Vac UL file no. E91274
15A 1/2HP, 125/250Vac CSA file no. LR85259-2



C0320BB
16A 125/250Vac T85 50E3

16A 250Vac 3/4hp T85 125Vac 1/2hp UL file no. E45221



RoHS compliant

μ contact gap.

C0320AA




ORDER FORMAT

TERMINAL FUNCTION ACTUATOR MOUNTING

ORDER CODE	TERMINAL	FUNCTION	ACTUATOR	MOUNTING
C0320AA	 6.3 x 0.8 12.5	 ON - OFF (momentary OFF)		 2 off 3.4mm mounting holes or M3 screw holes
C0320BB	 6.3 x 0.8 12.0	 ON - OFF (momentary OFF)		

Dimensions (mm)

C0320AA

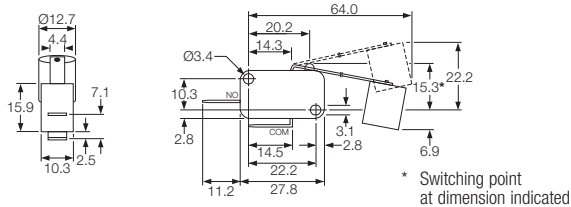

C0320BB

